


designed by
Graham McAllister

ScaleSailing.com

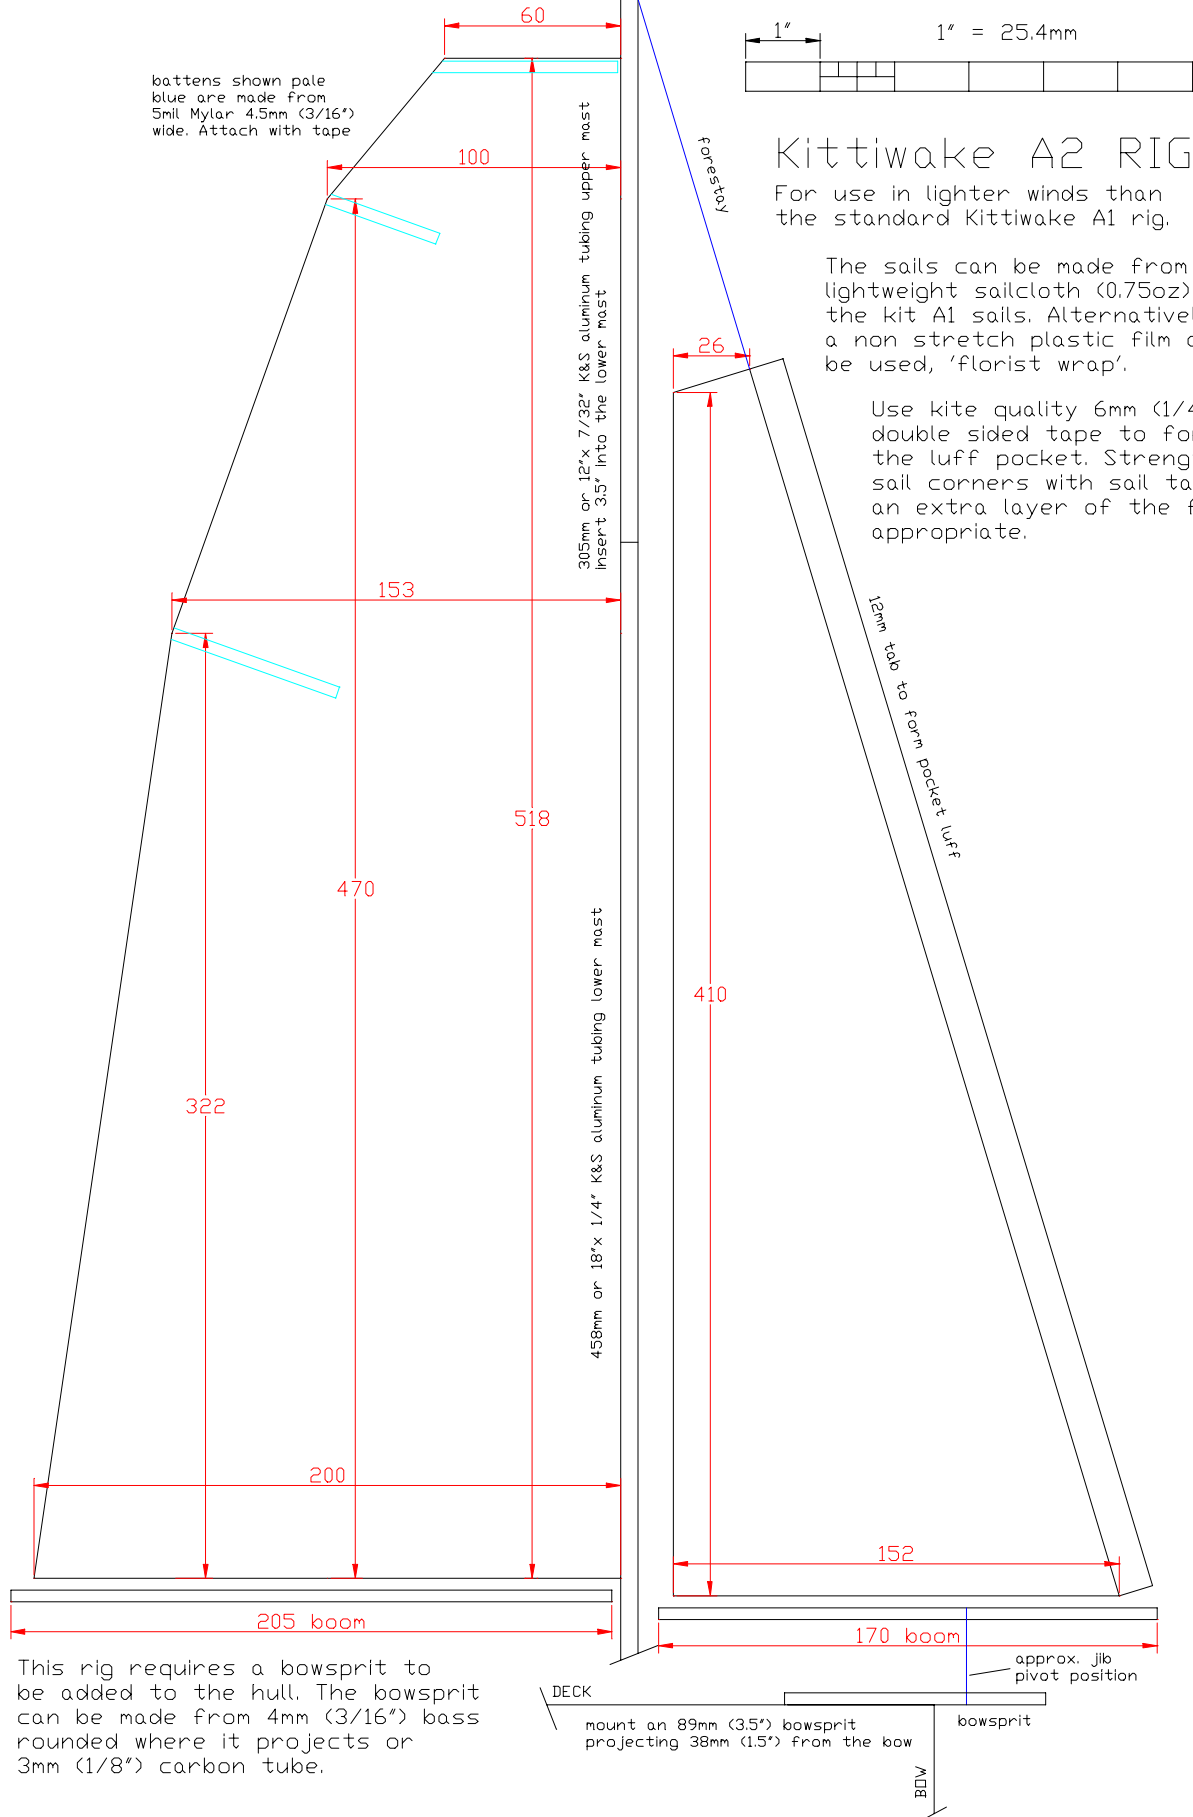

battens shown pale blue are made from 5mil Mylar 4.5mm (3/16") wide. Attach with tape

Kittiwake A2 RIG

For use in lighter winds than the standard Kittiwake A1 rig.

The sails can be made from a lightweight sailcloth (0.75oz) as the kit A1 sails. Alternatively a non stretch plastic film can be used, 'florist wrap'.

Use kite quality 6mm (1/4") double sided tape to form the luff pocket. Strengthen sail corners with sail tape or an extra layer of the film as appropriate.

This rig requires a bowsprit to be added to the hull. The bowsprit can be made from 4mm (3/16") bass rounded where it projects or 3mm (1/8") carbon tube.