


designed by  
**Graham McAllister**  
**ScaleSailing.com**


The sails can be made from a lightweight sailcloth (0.75oz) as the kit A1 sails. Alternatively a non stretch plastic film can be used, 'florist wrap'.



**Kittiwake B RIG**

For use in strong winds

Use kite quality 6mm (1/4") double sided tape to form the luff pockets. Strengthen sail corners with sail tape or an extra layer of the film as appropriate.

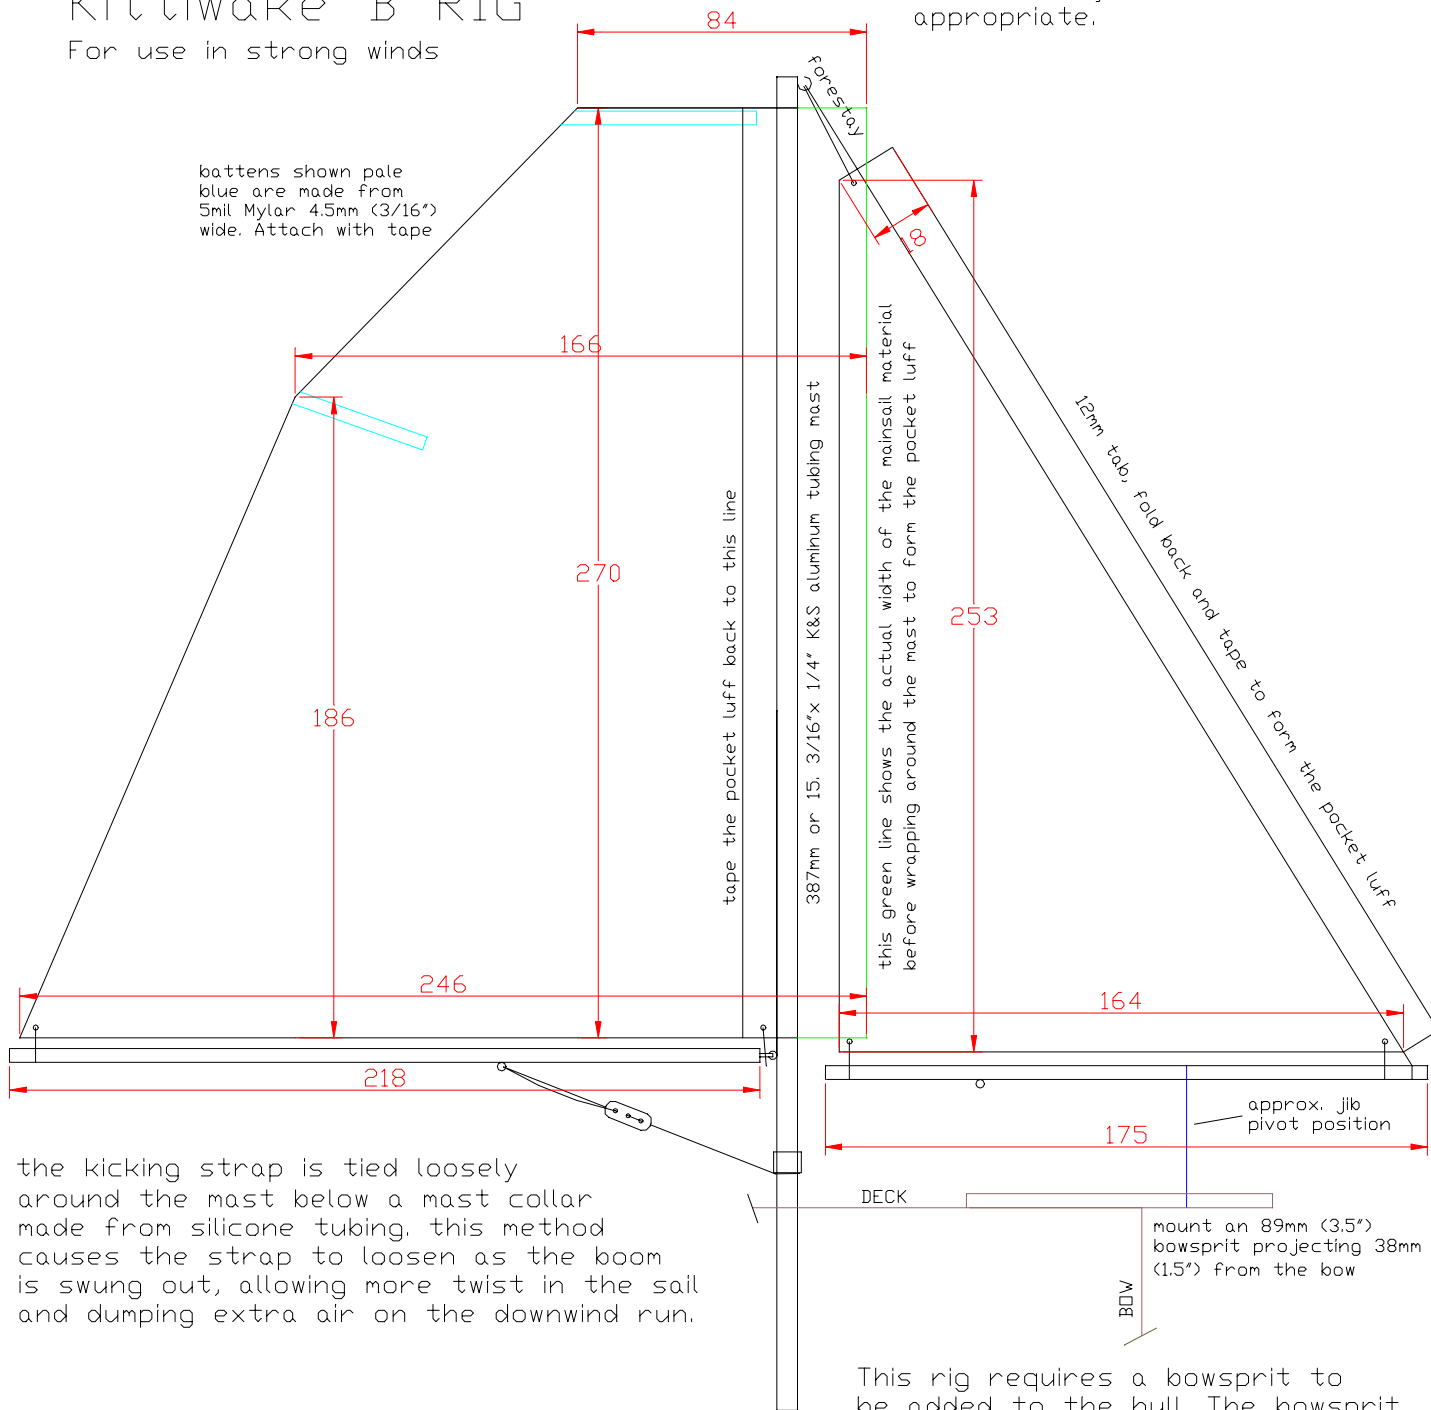

the kicking strap is tied loosely around the mast below a mast collar made from silicone tubing. this method causes the strap to loosen as the boom is swung out, allowing more twist in the sail and dumping extra air on the downwind run.

This rig requires a bowsprit to be added to the hull. The bowsprit can be made from 4mm (3/16") bass rounded where it projects or 3mm (1/8") carbon tube.